



# SISTEM C™ CITTA

## GLAZED CERAMIC WALL

### WALL TILE



**KYWP** Bianco\_C



**KYWT** Avorio\_C



**MIOV** Odra\_C



**MIOQ** Grigio\_C



**MJ09** Pistacchio\_C



**MIOU** Creta\_C




**KYWS** Cemento\_C



**MIOR** Fumo\_C



**MIOZ** Turchese\_C



**MIoT** Tortora\_C




**MIOW** Rosso\_C




**MIOX** Ametista\_C



**MIOY** Cobalto\_C




**KYWR** Agata\_C



**KYWQ** Nero\_C

### DIMENSIONAL INSERT 4 x 12

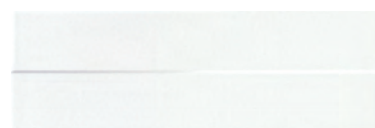

**MJ7U** Bianco\_C



### USAGE

Floors	Walls	Countertops
	W	



BIANCO\_C - TURCHESE\_C

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 12 Wall Tile	(3-15/16" x 11-13/16") (10.00 cm x 30.00 cm)	5/16"	11.63	36
	4 x 12 Dimensional Insert	(3-15/16" x 11-13/16") (10.00 cm x 30.00 cm)	5/16"	9.36	29

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

### APPLICATION NOTES:


Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

	Wall Tile 4 x 12 Matte	Deco 4 x 12 Dimensional Insert	Trim 4 x 12 Wall Bullnose
Agata_C	KYWR		ULFD
Ametista_C	MIOX		ULFG
Avorio_C	KYWT		ULFA
Bianco_C	KYWP	MJ7U	ULF6
Cemento_C	KYWS		ULF9
Cobalto_C	MIOY		ULFK
Creta_C	MIOU		ULFB
Fumo_C	MIOR		ULF8
Grigio_C	MIOQ		ULF7
Nero_C	KYWQ		ULFL
Ocra_C	MIOV		ULFE
Pistacchio_C	MJ09		ULFJ
Rosso_C	MIOW		ULFF
Tortora_C	MIOT		ULFC
Turchese_C	MIOZ		ULFH

## TRIM

Description	Size	Shape
Wall Bullnose (12 inch side)	4 x 12	

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Low Variation

## PERFORMANCE CHARACTERISTICS

	ASTM#	Floor/Deco Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).



Pre-Consumer  
Recycled Content



All or select items within this series meet the requirements for these qualifications. For more information visit [marazzitile.com](http://marazzitile.com).