

# ARTEA STONE™

## GLAZED PORCELAIN

REVEAL IMAGING®


### FLOOR TILE




Antico



Avorio

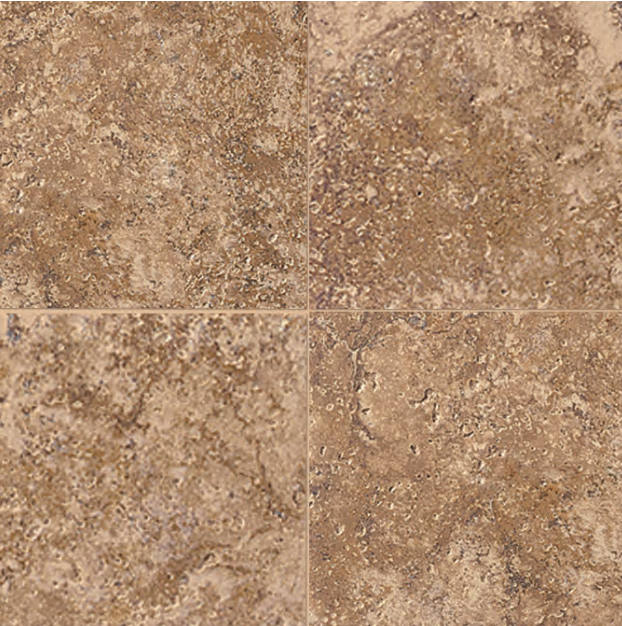

Noce

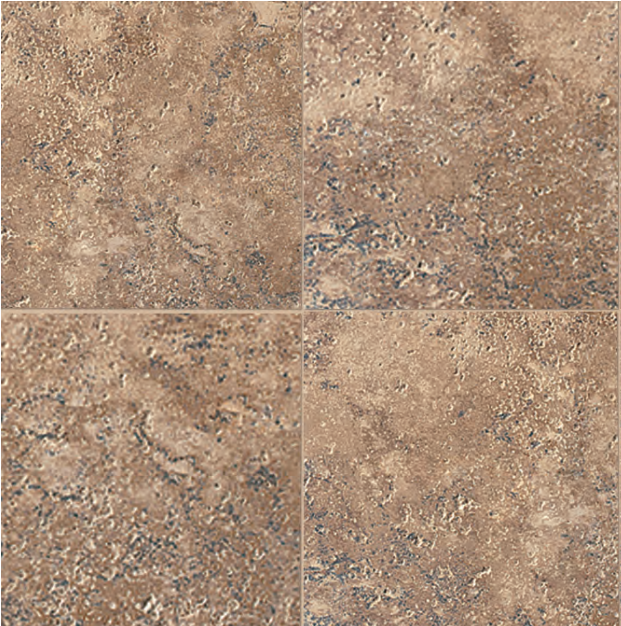

Cappuccino

FLOOR TILE




### USAGE

Floors	Walls	Countertops
F	W	C



ANTICO

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	20 x 20 Floor Tile	(19-11/16" x 19-11/16") (50.00 cm x 50.00 cm)	3/8"	18.83	7
	13 x 13 Floor Tile	(13-1/8" x 13-1/8") (33.30 cm x 33.30 cm)	5/16"	17.90	15
	6-1/2 x 13 Floor Tile	(6-1/2" x 13-1/8") (16.50 cm x 33.30 cm)	5/16"	10.65	18

## APPLICATIONS





	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	■
Wet & Level - Interior Floor	≥ 0.42	■
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

### APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

## TRIM

Description	Size	Shape
Floor Bullnose	3 x 13	
Cove Base	6 x 8	
Cove Base Outcorner	1 x 6	
Cove Base Incorner	1 x 6	

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)	 Medium Variation

## PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	IV

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim should be checked for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [marazzitile.com/LargeTiles](http://marazzitile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [marazzitile.com](http://marazzitile.com).

	Floor Tile			Trim			
	20 x 20	13 x 13	6-1/2 x 13	3 x 13 Floor Bullnose	6 x 8 Cove Base	1 x 6 Cove Base Outcorner	1 x 6 Cove Base Incorner
Antico	UC4J	UC4D	UC48	UC4R	UD1M	UD1X	UD1S
Avorio	UC4K	UC4E	UC49	UC4S	UD1N	UD1Y	UD1T
Cappuccino	UC4H	UC4C	UC47	UC4Q	UD1P	UD1Z	UD1U
Noce	UC4G	UC4B	UC46	UC4P	UD1Q	UD20	UD1V



Floor Tile



Wall Tile



Reveal Imaging®



Pre-Consumer  
Recycled Content



All or select items within this series meet the requirements for these qualifications. For more information visit [marazzitile.com](http://marazzitile.com).