

KENDAL SLATE™
GLAZED PORCELAIN

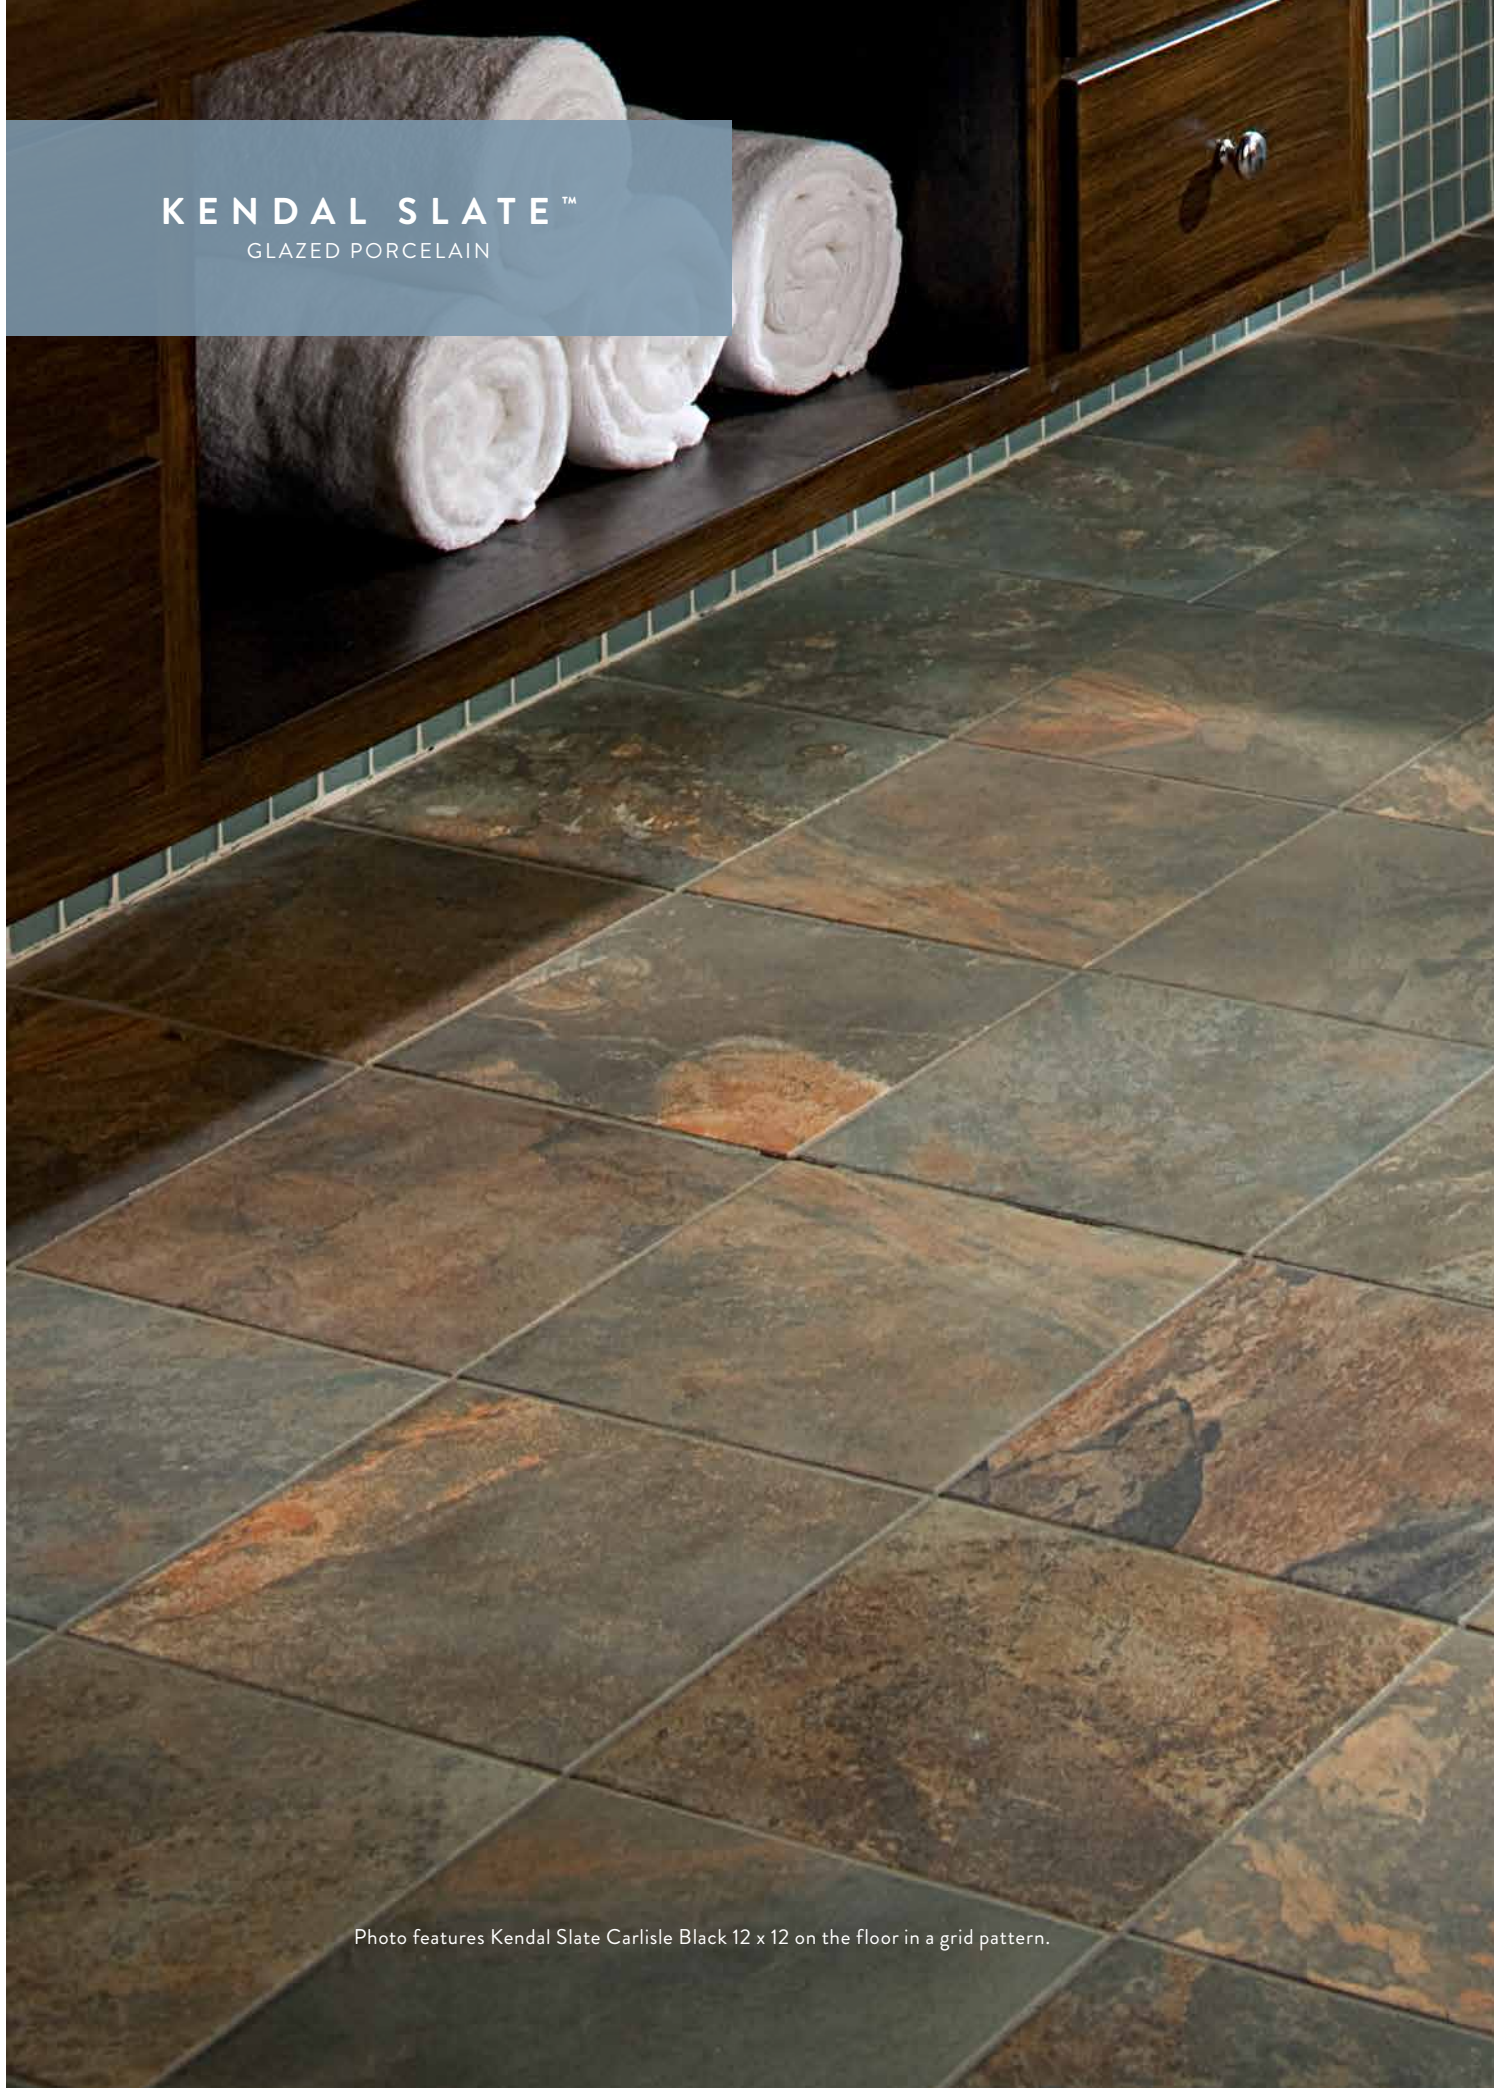


Photo features Kendal Slate Carlisle Black 12 x 12 on the floor in a grid pattern.

Kendal Slate™ is an exquisite combination of beauty and strength. Its rich complexion flawlessly captures a true interpretation of natural slate. It is the premier choice for realistic, classic design enhanced with innovative Reveal Imaging®. Embrace this luxurious collection with remarkable true visuals, smooth, enticing texture and easy maintenance that comes standard in porcelain tile.


GLAZED PORCELAIN FLOOR TILE



AMBLESIDE BEIGE KS01



EASDALE NEUTRAL KS02

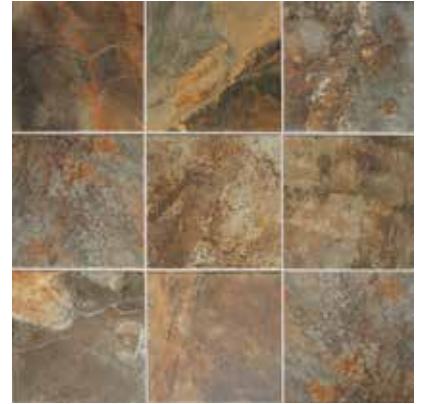

CARLISLE BLACK KS03


GLAZED PORCELAIN MOSAIC



AMBLESIDE BEIGE KS01



EASDALE NEUTRAL KS02

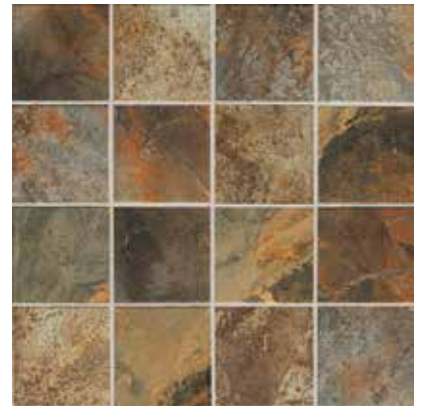





CARLISLE BLACK KS03



Photo features Kendal Slate™ Carlisle Black 12 x 12 on the floor in a grid pattern.

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	18 x 18 Floor Tile * 17-3/4" x 17-3/4" (45.20 cm x 45.20 cm)		5/16"	18.00	8
	12 x 12 Floor Tile * 11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)		5/16"	15.00	15
	6 x 6 Floor Tile * 5-13/16" x 5-13/16" (14.70 cm x 14.70 cm)		5/16"	11.00	44
	3 x 3 Mosaic ■ 12" x 12" Sheet (30.00 cm x 30.00 cm Sheet)		5/16"	7.00	7

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P-43C9	30
	Cove Base □	6 x 12	P-36C9T	22
	Cove Base Outcorner □	6 x 1	PC-36C9T	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

* Modular sizes ■ Mesh-mounted □ Ceramic body

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)

Mosaic: 1/8"

RELATIVE PRICING: Medium to High

SHADE VARIATION



RANDOM
(V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs.	> 275 lbs.
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	4	4

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, refer to p. 294.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* 6 x 6 floor and mosaic tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" on p. 293.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, refer to p. 295.

For information on Test Results & Classifications, see p. 294.

For Installation Considerations, Care & Maintenance information, see pp. 295-297.



All or select items within this series meet the requirements for these qualifications. For more information, refer to p. 304.